


suit for shaft diameter
metric: $\phi 14 \sim \phi 60\text{mm}$

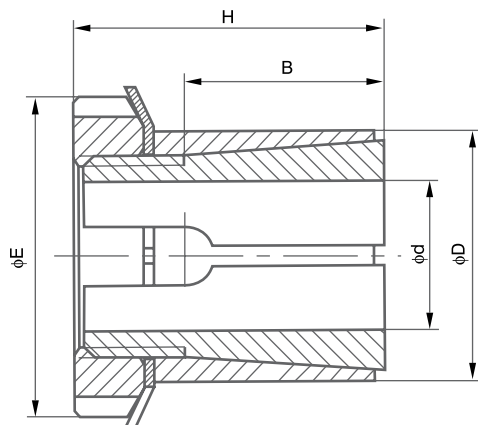

LOCK 2

Dimensions				Rated Load		Surface Pressure		Screws DIN 912-12.9	
dxD [mm]	E [mm]	B [mm]	H [mm]	Mt [Nm]	Ft [kN]	Pw [N/mm ²]	PN [N/mm ²]	Type	Ta [Nm]
14x25	32	20	30	64	9	85	45	KM4	95
15x25	32	20	30	70	9	80	45	KM4	95
16x25	32	20	30	73	9	75	45	KM4	95
17x25	32	20	32	80	9	70	45	KM4	95
18x30	38	20	32	100	10	80	45	KM5	160
19x30	38	20	32	105	11	75	45	KM5	160
20x30	38	20	32	112	11	70	45	KM5	160
22x35	45	25	36	163	14	70	45	KM6	220
24x35	45	25	36	178	14	65	45	KM6	220
25x35	45	25	36	185	14	60	45	KM6	220
28x40	52	30	42	250	17	55	40	KM7	340
30x40	52	30	42	270	17	50	40	KM7	340
32x45	58	30	44	350	21	60	45	KM8	480
35x45	58	30	44	390	21	55	45	KM8	480
38x50	65	30	45	500	26	60	45	KM9	680
40x50	65	30	45	520	26	55	45	KM9	680
42x55	70	30	46	630	30	65	50	KM10	870
45x55	70	30	46	680	30	60	50	KM10	870
48x60	75	30	46	840	35	60	50	KM11	970
50x60	75	30	46	880	35	60	50	KM11	970
55x65	80	30	46	1030	37	60	50	KM12	1100
60x70	85	30	52	1360	45	65	55	KM13	1300

Weitere Größen auf Anfrage
Additional sizes on request

Änderungen und Rechte vorbehalten
Subject to alteration