


suitable for shaft diameter
 $\phi 14 \sim \phi 50(\text{mm})$

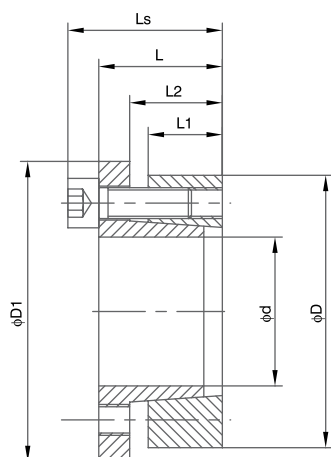

LOCK 8

Dimensions						Rated Load		Surface Pressure		Screws DIN 912-12.9		
dxD [mm]	L1 [mm]	L2 [mm]	L [mm]	Ls [mm]	D1 [mm]	Mt [Nm]	Ft [kN]	Ps [N/mm2]	Ph [N/mm2]	N	Type	Ta [Nm]
14x55	17	22	30	38	62	120	18.1	205	55	3	M8	25
16x55	17	22	30	38	62	140	18.1	180	55	3	M8	25
18x55	17	22	30	38	62	150	18.1	160	55	3	M8	25
19x55	17	22	30	38	62	160	18.1	150	55	3	M8	25
20x55	17	22	30	38	62	170	18.1	145	55	3	M8	25
22x55	17	22	30	38	62	280	25.3	185	75	3	M8	35
24x55	17	22	30	38	62	300	25.3	170	75	3	M8	35
25x55	17	22	30	38	62	310	25.3	165	75	3	M8	35
28x55	17	22	30	38	62	430	31.4	175	90	3	M8	41
30x55	17	22	30	38	62	470	31.4	165	90	3	M8	41
24x65	17	22	30	38	72	440	37.4	245	90	5	M8	30
25x65	17	22	30	38	72	460	37.4	235	90	5	M8	30
28x65	17	22	30	38	72	600	43.6	245	105	5	M8	35
30x65	17	22	30	38	72	640	43.6	230	105	5	M8	35
32x65	17	22	30	38	72	690	43.6	215	105	5	M8	35
35x65	17	22	30	38	72	910	52.5	235	130	5	M8	41
38x65	17	22	30	38	72	990	52.5	220	130	5	M8	41
40x65	17	22	30	38	72	1050	52.5	205	130	5	M8	41
30x80	20	25	33	41	87	780	52.4	235	90	7	M8	30
32x80	20	25	33	41	87	830	52.4	220	90	7	M8	30
35x80	20	25	33	41	87	1060	61	230	100	7	M8	35
38x80	20	25	33	41	87	1150	61	215	100	7	M8	35
40x80	20	25	33	41	87	1220	61	205	100	7	M8	35
42x80	20	25	33	41	87	1540	73.5	235	120	7	M8	41
45x80	20	25	33	41	87	1650	73.5	220	120	7	M8	41
48x80	20	25	33	41	87	1760	73.5	205	120	7	M8	41
50x80	20	25	33	41	87	1830	73.5	195	120	7	M8	41

Weitere Größen auf Anfrage
Additional sizes on request

Änderungen und Rechte vorbehalten
Subject to alteration