



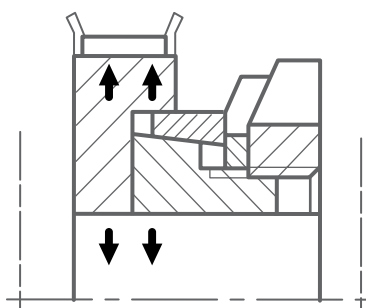

suit for shaft diameter
 $\phi 14\text{-}\phi 70\text{mm}$

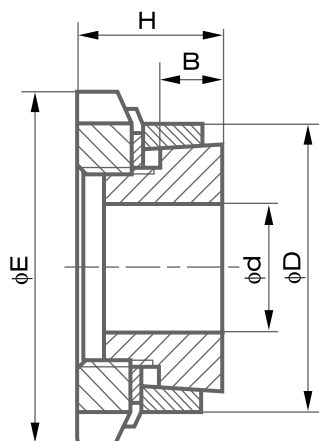

LOCK 9

Dimensions				Rated Load		Surface Pressure		Screws DIN 912-12.9	
dxD [mm]	E [mm]	B [mm]	H [mm]	Mt [Nm]	Ft [kN]	Pw [N/mm ²]	PN [N/mm ²]	Type	Ta [Nm]
14x25	32	6.5	16.5	38	5.1	200	110	KM4	95
15x25	32	6.5	16.5	41	5.5	185	110	KM4	95
16x25	32	6.5	16.5	43	5.45	174	110	KM4	95
17x26	32	6.5	16.5	47	5.5	164	107	KM4	95
18x26	32	6.5	16.5	49	5.4	155	107	KM4	95
19x30	38	6.5	18	62	6.6	176	112	KM5	160
20x30	38	6.5	18	66	6.6	167	111	KM5	160
22x32	38	6.5	18	73	6.6	152	105	KM5	160
24x35	45	6.5	18	105	8.75	185	127	KM6	220
25x35	45	6.5	18	110	8.8	178	127	KM6	220
28x36	45	6.5	18	120	8.55	159	124	KM6	220
30x40	52	7	19.5	160	10.6	164	123	KM7	340
32x42	52	7	19.5	170	10.6	154	117	KM7	340
35x45	58	8	21.5	230	13.1	153	120	KM8	480
36x45	58	8	21.5	240	13.3	149	120	KM8	480
38x48	58	8	21.5	250	13.1	141	112	KM8	480
40x52	65	10	24.5	310	15.5	120	93	KM9	680
42x55	65	10	25.5	320	15.2	114	87	KM9	680
45x57	70	10	25.5	400	17.7	122	96	KM10	870
48x62	75	10	25.5	500	20.8	135	105	KM11	970
50x62	75	10	25.5	520	20.8	130	105	KM11	970
55x68	80	12	27.5	610	22	103	84	KM12	1100
56x68	80	12	27.5	620	22	101	82	KM12	1100
60x73	85	12	28.5	800	26.6	113	93	KM13	1300
63x79	92	14	30.5	980	31.1	107	86	KM14	1600
65x79	92	14	30.5	1010	31	104	86	KM14	1600
70x84	98	14	31.5	1240	35.4	110	92	KM15	2000

Weitere Größen auf Anfrage
Additional sizes on request

Änderungen und Rechte vorbehalten
Subject to alteration