


suit for shaft diameter $\phi 45 \sim \phi 400$ (mm)

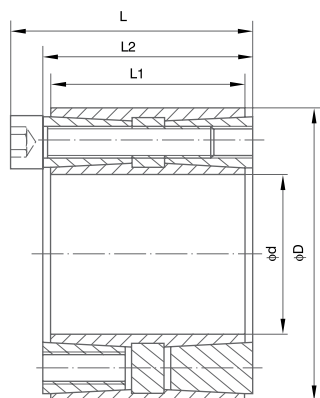

LOCK 14

Dimensions				Rated Load		Surface Pressure		Screws DIN 912-12.9		
dxD [mm]	L1 [mm]	L2 [mm]	L [mm]	Mt [kNm]	Ft [kN]	Ps [N/mm2]	Ph [N/mm2]	N	Type	Ta [Nm]
45x75	56	64	72	3460	155	165	100	9	M8	41
48x80	56	64	72	3680	155	150	95	9	M8	41
50x80	56	64	72	3820	155	147	95	9	M8	41
55x85	56	64	72	4260	155	135	85	9	M8	41
60x90	56	64	72	5820	190	155	100	11	M8	41
65x95	56	64	72	6270	190	140	95	11	M8	41
70x110	70	78	88	10730	305	170	105	11	M10	83
75x115	70	78	88	11540	305	155	100	11	M10	83
80x120	70	78	88	14700	369	175	115	12	M10	83
85x125	70	78	88	15700	369	165	110	12	M10	83
90x130	70	78	88	16610	370	157	106	13	M10	83
95x135	70	78	88	17530	370	150	102	13	M10	83
100x145	90	100	112	26900	538	160	110	12	M12	145
110x155	90	100	112	29530	538	143	102	13	M12	145
120x165	90	100	112	37610	628	154	112	15	M12	145
130x180	104	116	130	48000	738	143	106	13	M14	230
140x190	104	116	130	60290	861	160	117	15	M14	230
150x200	104	116	130	73800	985	165	125	16	M14	230
160x210	104	116	130	78770	983	155	118	17	M14	230
170x225	134	146	162	101730	1197	140	108	15	M16	355
180x235	134	146	162	123200	1369	150	115	16	M16	355
190x250	134	146	162	129880	1368	141	110	17	M16	355
200x260	134	146	162	136840	1368	137	104	17	M16	355
220x285	134	146	162	188000	1710	155	120	20	M16	355
240x305	134	146	162	225000	1880	155	120	22	M16	355
260x325	134	146	162	244000	1880	155	115	22	M16	355
280x355	165	177	197	373000	2670	145	120	20	M20	690
300x375	165	177	197	440000	2930	155	25	22	M20	690
320x405	165	177	197	470000	2930	145	115	22	M20	690
340x425	165	177	197	544000	3200	150	120	24	M20	690
360x455	190	202	224	658000	3650	140	110	22	M22	930
380x475	190	202	224	821000	4320	160	130	26	M22	930
400x495	190	202	224	864000	4320	150	120	26	M22	930

Weitere Größen auf Anfrage
Additional sizes on request

Änderungen und Rechte vorbehalten
Subject to alteration